


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|---------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 8/21/13 | D.GRIFFIN |
| - | - | - | - |
| - | - | - | - |

| DESCRIPTION | MATERIAL | FINISH |
|----------------|-------------------|--------------|
| SHELL / BODY | BRASS | CuSnZn3 |
| CENTER CONTACT | BRASS/PHOS.BRONZE | GOLD/CuSnZn3 |
| INSULATOR | PTFE | - |
| O-RING | RUBBER | - |

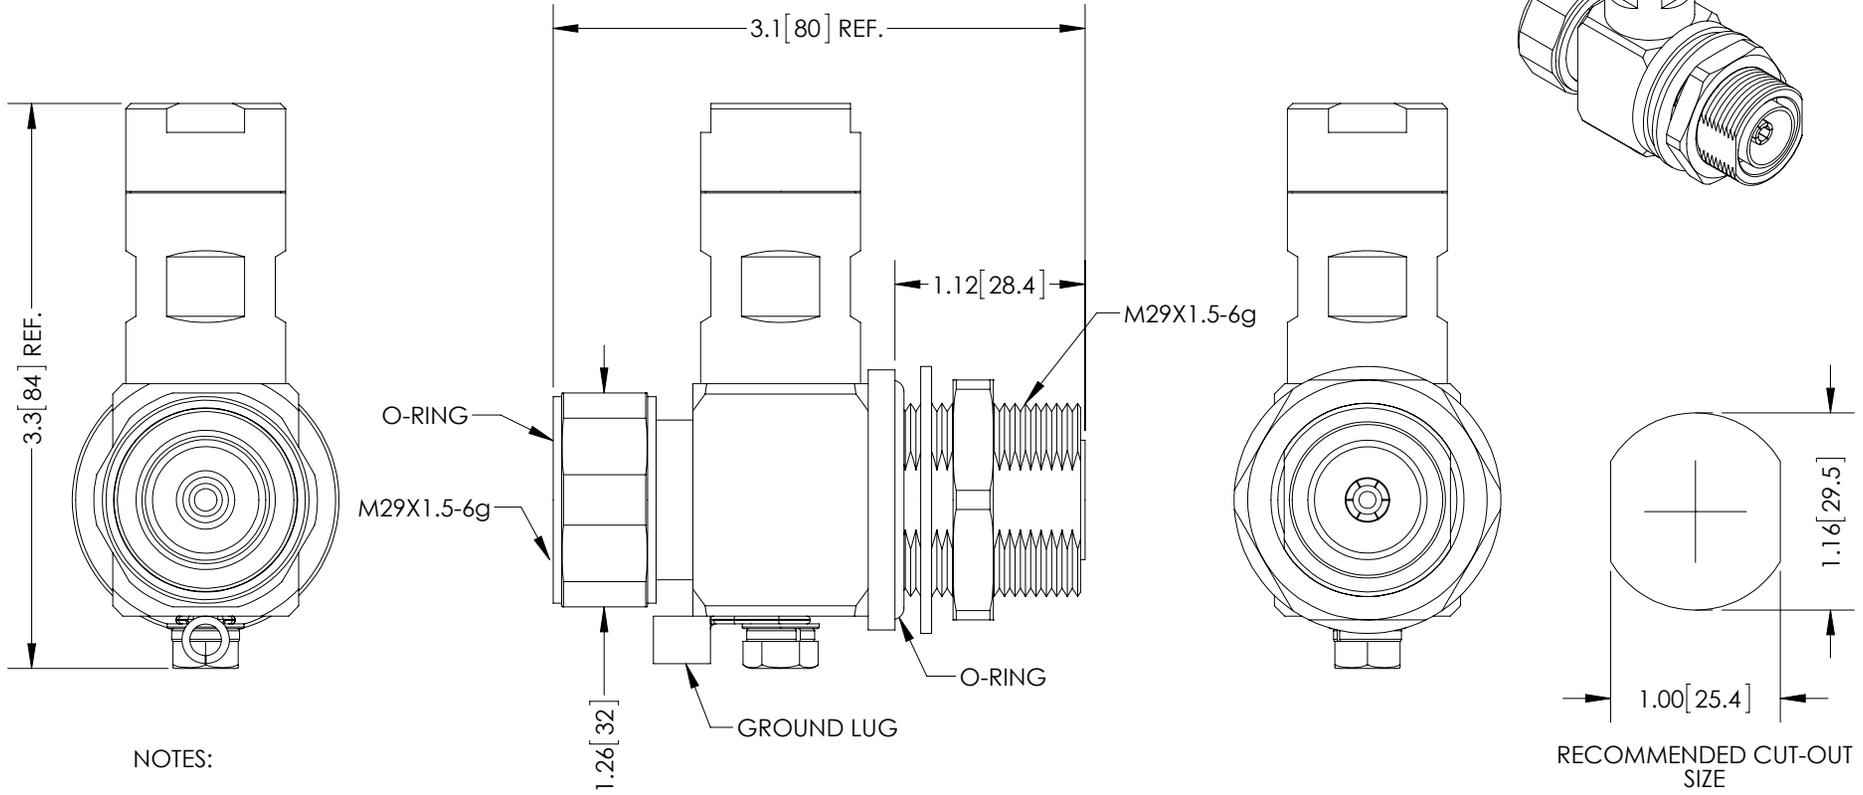

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 800 - 2250MHz
 DIELECTRIC WITHSTANDING VOLTAGE: 4000V (RMS)

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PKG-00064.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:

RoHS, CE

| | | | | |
|--|--|------------------|--|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] | APPROVALS | DATE | | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 |
| | DRAWN BY B.PUCHASKI | 08/20/13 | | |
| DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [2.5] .XXX = ±.005 [1.3] | CHECKED BY K.BURGNER | 08/20/13 | CATEGORY | |
| | APPROVED BY K.BURGNER | 08/20/13 | LIGHTNING PROTECTOR | |
| ANGULAR TOLERANCES: ALL = ± 1° | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | | PRODUCT DESCRIPTION 7/16 DIN MALE TO 7/16 DIN FEMALE BULKHEAD 1/4 WAVE LIGHTNING PROTECTOR | |
| PROJECTION | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 | DWG. NO. ALQ2-DMDFB |
| | | SCALE: NONE | CAD FILE: ALQ2-DMDFB.SLDRW | SHEET 1 OF 1 |