




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/26/10	B.PUCHASKI
B	ECN 5802: CHANGED VALUES TO 0 - 4 GHz	11/2/11	D.FRISIELLO
C	ECN 6355: ADDED .128" CRIMP SIZE FOR SMALLER END OF STEP FERRULE	8/21/12	D.DESJARDIN
D	ECN 6534: CHANGE SMALL CRIMP SIZE .128 TO .151	11/19/12	B.PUCHASKI


DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
LOCK RING	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
SPACER	TEFLON	---
INSULATOR	TEFLON	---
SPACER	BRASS	NICKEL

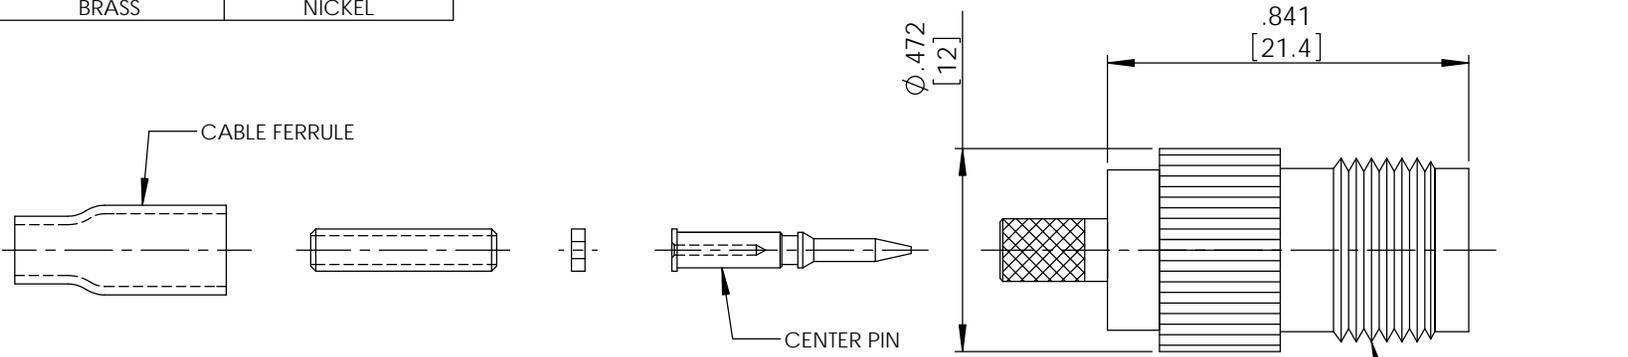


RECOMMENDED CABLE FERRULE CRIMP SIZE (SMALLER END)



RECOMMENDED CABLE FERRULE CRIMP SIZE (LARGER END)



RECOMMENDED CENTER PIN CRIMP SIZE

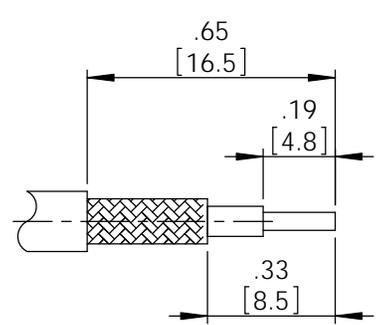

RECOMMENDED CABLE STRIPPING

NOTES:
ELECTRICAL:
 IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 1500V
 FREQUENCY RANGE: 0~4 GHz
 VSWR: <1.50 @ 0~4 GHz
 DURABILITY: > 500 CYCLE
 CABLE RETENTION: > 30 POUNDS

MISCELLANEOUS:
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.Puchaski	02/26/10		
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	CHECKED BY M.Audas	02/26/10	CATEGORY COAXIAL	
	APPROVED BY M.Audas	02/26/10	PRODUCT DESCRIPTION RP-TNC Straight Jack Crimp for RG316/U, RG174/U, RG188A/U, 100-Series	
ANGULAR TOLERANCES: ALL = ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	FSCM NO. 43321	DWG. NO. ARTJ-1100
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: ARTJ-1100.SLDDRW	REV. D
			SHEET 1 OF 1	