
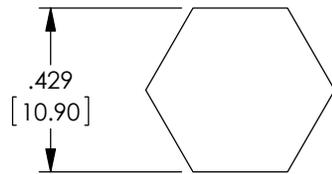




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/22/05	JC
B	ECN 4368: UPDATED FORMAT AND CONNECTOR INFO	11/11/09	B.PUCHASKI
C	ECN 5802: CHANGED VALUES TO 0 - 4 GHz	11/2/11	D.FRISIELLO
D	ECN 7660: REVISED DRAWING TO MATCH VENDOR SPEC., ADDED CRIMP	10/31/14	D.FRISIELLO



DESCRIPTION	MATERIAL	FINISH
CENTER CONTACTS	BRASS	GOLD
OUTER CONTACT	BRASS	NICKEL
BODY	BRASS	NICKEL
CRIMP FERRULE	BRASS	NICKEL
INSULATOR	PTFE	---

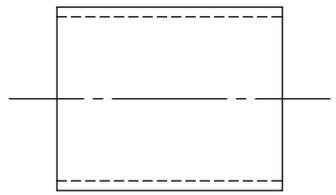

RECOMMENDED FERRULE CRIMP SIZE



RECOMMENDED PIN CRIMP SIZE (OR SOLDERED)

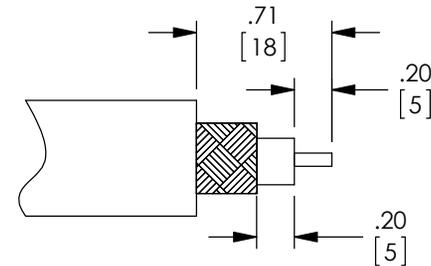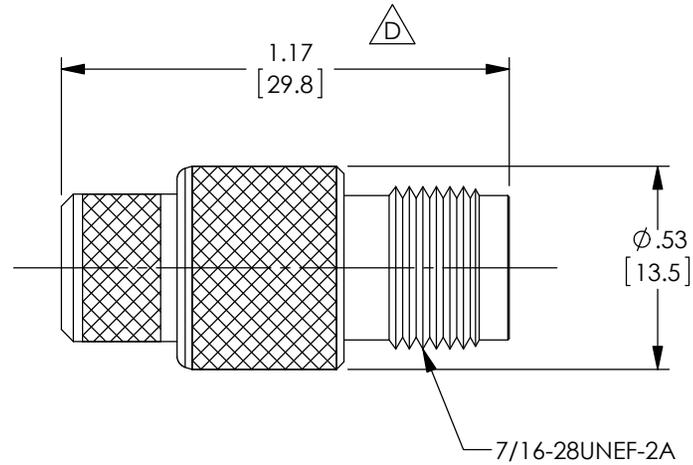

RECOMMENDED CABLE STRIPPING

NOTES:

ELECTRICAL:
 IMPEDANCE: 50 OHMS
 WITHSTAND VOLTAGE: 1500V
 FREQUENCY RANGE: 0~4 GHz
 VSWR: <math><1.50</math> @ 0~4 GHz
 DURABILITY: ≥ 500 CYCLE
 CABLE RETENTION: > 40 POUNDS

MISCELLANEOUS:
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12 [305] = +1 [25] / -0$ $>12 [305] \leq 60 [1524] = +2 [51] / -0$ $>60 [1524] \leq 120 [3048] = +4 [102] / -0$ $>120 [3048] \leq 300 [7620] = +6 [152] / -0$ $>300 [7620] = +5\% / -0\%$	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	11/11/09		
ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2 [5.08]$.XX = $\pm .02 [51]$.XXX = $\pm .005 [13]$	CHECKED BY M.AUDAS	11/11/09	CATEGORY COAXIAL	
	APPROVED BY M.AUDAS	11/11/09	PRODUCT DESCRIPTION CON,RP-TNC JACK CRIMP LMR400	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. ARTJ-1404	REV. D
			SCALE: NONE	CAD FILE: ARTJ-1404.SLDDRW
				SHEET 1 OF 1