
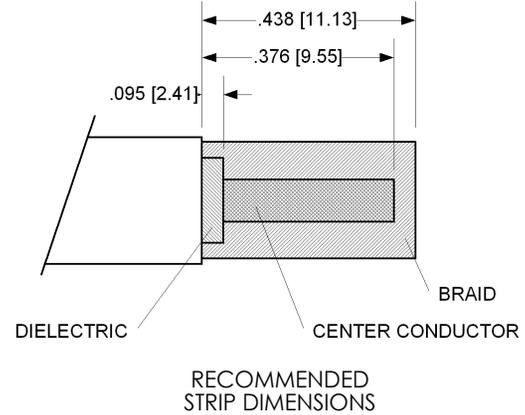
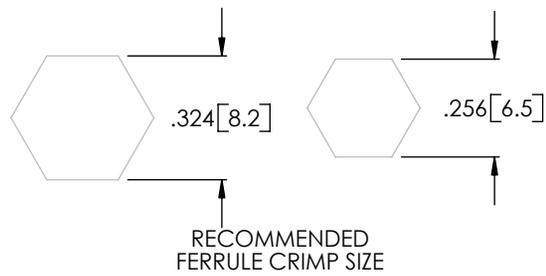
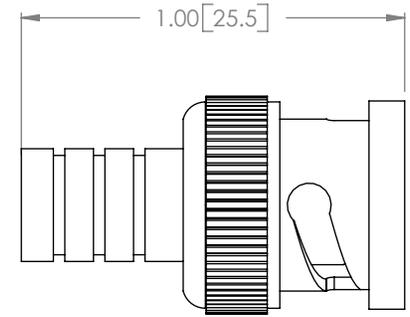


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	11/08/01	MCCORMICK
B	UPDATED DRAWING PER ECN# 1204	09/27/02	MCCORMICK
C	ECN 3139: UPDATE DWG FORMAT	1/4/08.	D.GRIFFIN

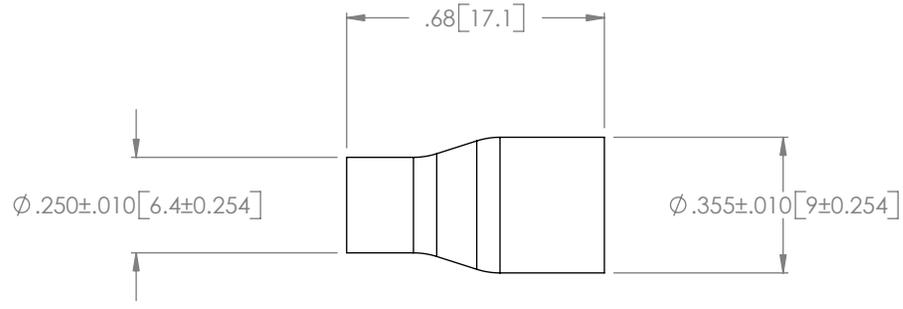

NOTES:

MATERIAL:
 BODY: BRASS
 DIELECTRIC: ACETAL
 CENTER PIN: BRASS

FINISH:
 BODY: NICKEL PLATE
 CENTER PIN: GOLD PLATE

- NOTES:
 1. CHARACTERISTIC IMPEDANCE: 75 OHMS
 2. RECOMMENDED APPLICATION: RG59 PLENUM COAXIAL CABLE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
 TOLERANCES TO BE:
 .X ±.1 [2.5] ANGLES ±2°
 .XX ±.01 [.25]
 .XXX ±.005 [.13]
 OVERALL CABLE LENGTH TOL:
 ≤ 60 [1524] +3 [76.2] / -0
 > 60 [1524] +5% / -0%

APPROVALS	DATE
DRAWN BY MCCORMICK	11/05/01
CHECKED BY ENG	11/05/01
APPROVED BY R.CARRICK	11/05/01

L-com CONNECTIVITY PRODUCTS		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY		COAXIAL	
PRODUCT DESCRIPTION		CONN 75OHM BNCM RG59 CRMP TFE	
SIZE A	FSCM NO. 43321	DWG. NO. BAC031	REV. C
SCALE: NONE		CAD FILE: BAC031.SLDDRW	
		SHEET 1 OF 1	

